



Pierce Arrow XT Pumper  
Town of Clinton  
Job #28532

FEATURES & SPECIFICATIONS


- Pierce Arrow XT 81" Chassis with 10" Raised Roof
- Detroit Diesel DD13 500 hp Engine
- Allison EVS4000 P Automatic Transmission
- Hale QMAX-200 2000 GPM Single Stage Pump
- 1000 Gallon Poly Tank
- Oshkosh TAK-4 Independent Front Suspension
- Delivered in September 2015



***FIRE & SAFETY SERVICES, LTD.***

South Plainfield, NJ

web: [www.f-ss.com](http://www.f-ss.com) · phone: 800-400-8017

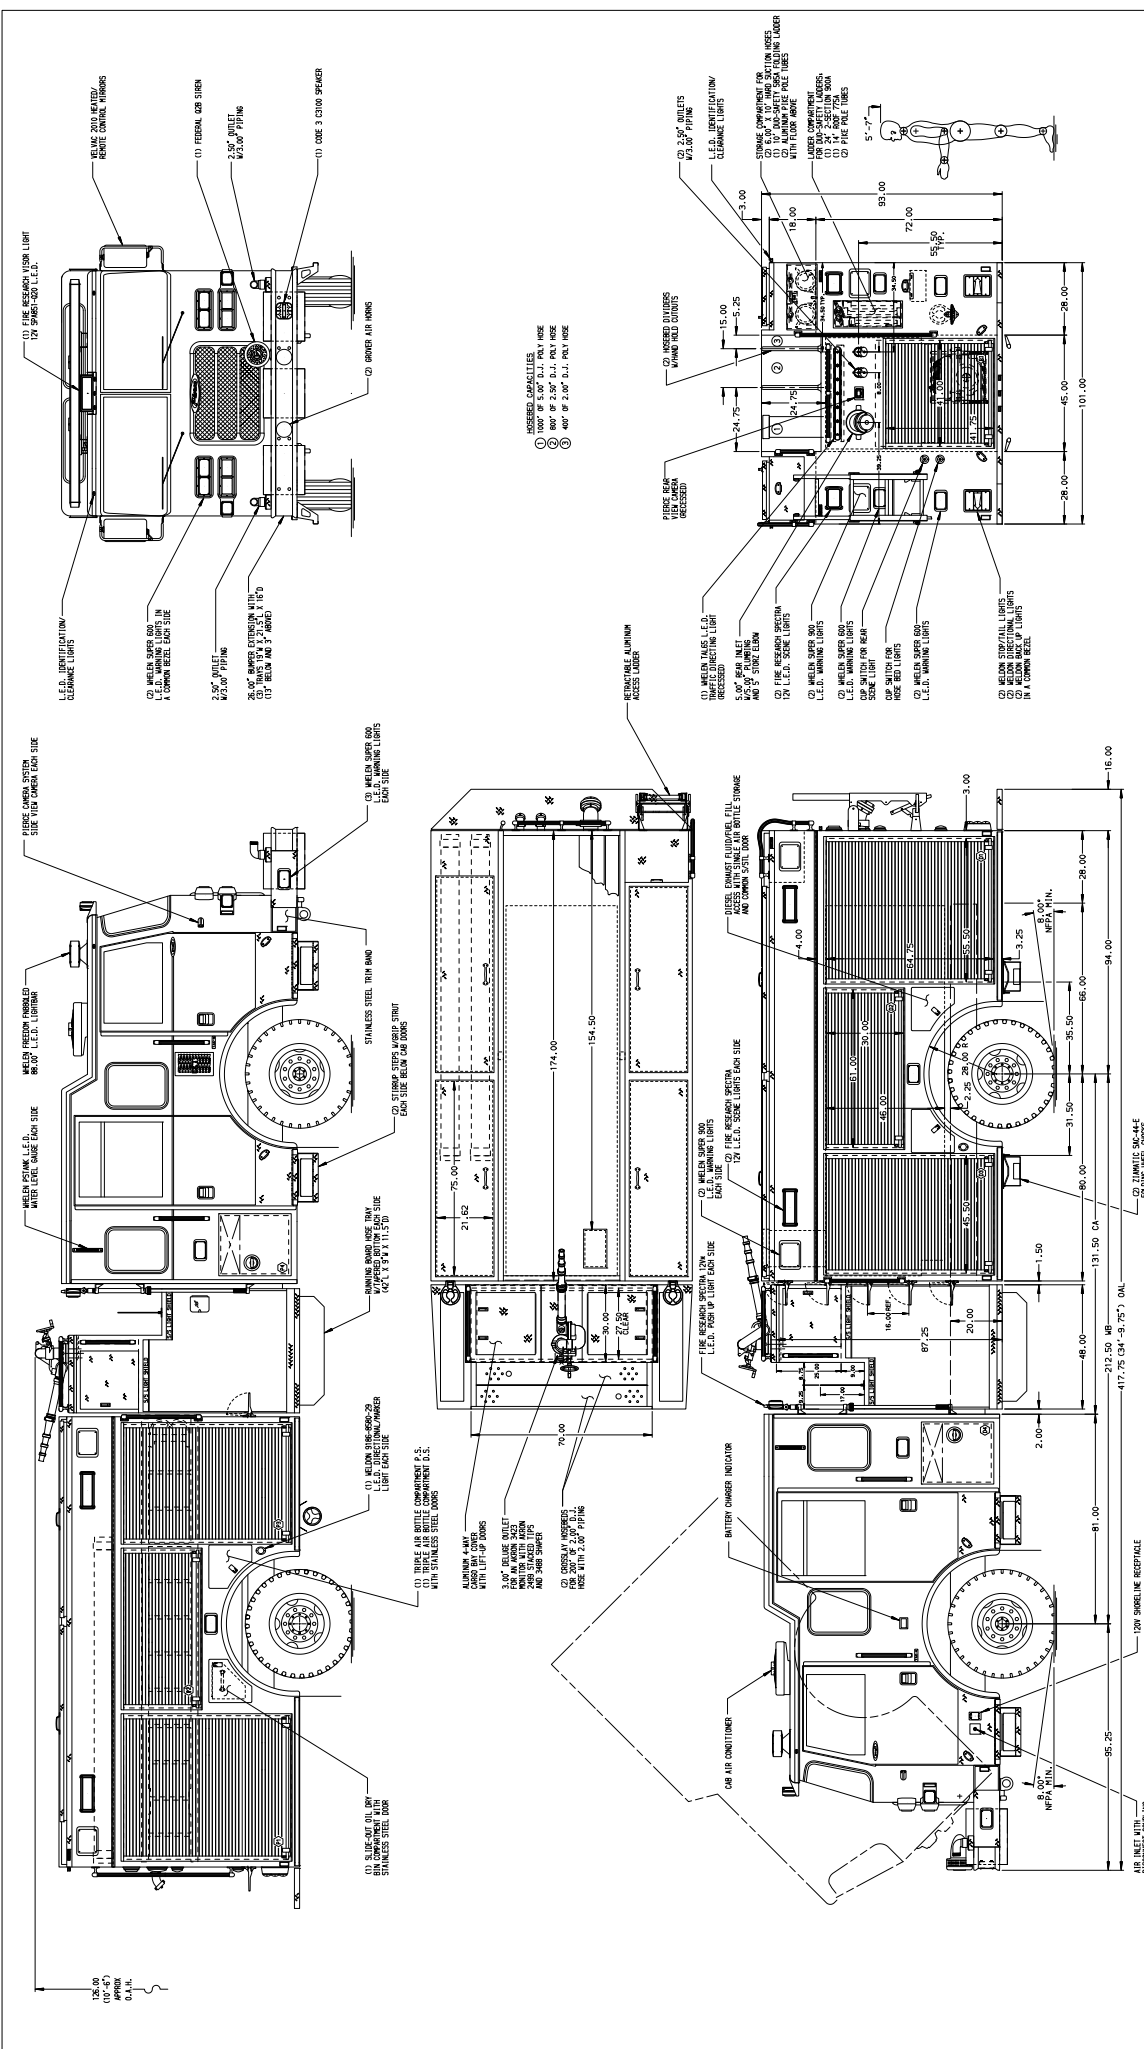

150.00  
 100.00  
 APPROX.  
 0.1% TOL.

JOB NO.		28532	
SCALE		1:24	
DATE	22DEC14	DRW BY	DDO
ISSUED BY	CSH	DESIGNED BY	CSH
SHEET NO.	D	SHEET SIZE	D
TOTAL SHEETS	1 of 2		

<b>PIERCE MANUFACTURING INC.</b>			
2000-D-1000 GAL POLY, 174" HOPR, PVC STYLE REAR COMP			
TITLE (2) XLAYS, DELUGE, LADDERS THRU PS BODY			
FOR CLINTON FIRE DEPARTMENT			
CLINTON, NJ			
DWG NO. 28532AD-SH1			

REV	DATE	BY	CHK	ARROW	XT
1					

CHASSIS DATA	PIERCE
WHEELS	DDO DTS
DRUMS	DDO DTS
WHEELS	DDO DTS
DRUMS	DDO DTS

ALUMINUM BODY

MAXIMUM O.A.H. 127.00"

SIDE ROLL & FRONTAL IMPACT PROTECTION

- NOTE: DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.
1. PUMP PANEL DRAWING REQUIRED FOR ALL CHASSIS
  2. SPLIT SUPPORTS ON CHASSIS FRAME AND EACH DOOR JAMB
  3. MOUNTING BRACES FOR INTERIOR LIGHTS LOCATED PER SHOP ORDER
  4. REINFORCING BRACES FOR INTERIOR LIGHTS LOCATED PER SHOP ORDER
  5. REINFORCING BRACES FOR INTERIOR LIGHTS LOCATED PER SHOP ORDER
  6. ALL POLYMER STEPS TO BE FINISHED WITH AN INTEGRATED L.E.D. LIGHT UNLESS SPECIFIED
  7. ALL POLYMER STEPS TO BE FINISHED WITH AN INTEGRATED L.E.D. LIGHT UNLESS SPECIFIED
  8. ALL POLYMER STEPS TO BE FINISHED WITH AN INTEGRATED L.E.D. LIGHT UNLESS SPECIFIED
  9. ALL POLYMER STEPS TO BE FINISHED WITH AN INTEGRATED L.E.D. LIGHT UNLESS SPECIFIED
  10. ALL POLYMER STEPS TO BE FINISHED WITH AN INTEGRATED L.E.D. LIGHT UNLESS SPECIFIED

11. PIERCE LOGO MOUNTED FRONT AND REAR
12. PIERCE LOGO MOUNTED ON EACH SIDE OF CAB
13. MAXIMUM 6-PIN E-LOCK RECEPTABLE LOCATED IN THE CAB
14. PIERCE L.E.D. STRIP LIGHTS LOCATED IN THE CABIN AREA PER SHOP ORDER