



**Pierce Velocity PUC Pumper**  
Millstone Fire District #1  
Job #33285

**FEATURES & SPECIFICATIONS**



- Pierce Velocity 70" Chassis with a 10" Raised Roof
- Cummins ISX12 500hp 2016 EPA compliant Engine
- Allison EVS4000P Automatic Transmission
- Dana Front and Meritor Rear Axles
- Pierce PUC 1500 GPM Single Stage Pump
- 750 Gallon Poly Water Tank
- Husky 12 Dual Agent Foam System
- Harrison 10kw Hydraulic Generator
- Delivered in September 2019



***FIRE & SAFETY SERVICES, LTD.***

South Plainfield, NJ

web: [www.f-ss.com](http://www.f-ss.com) · phone: 800-400-8017

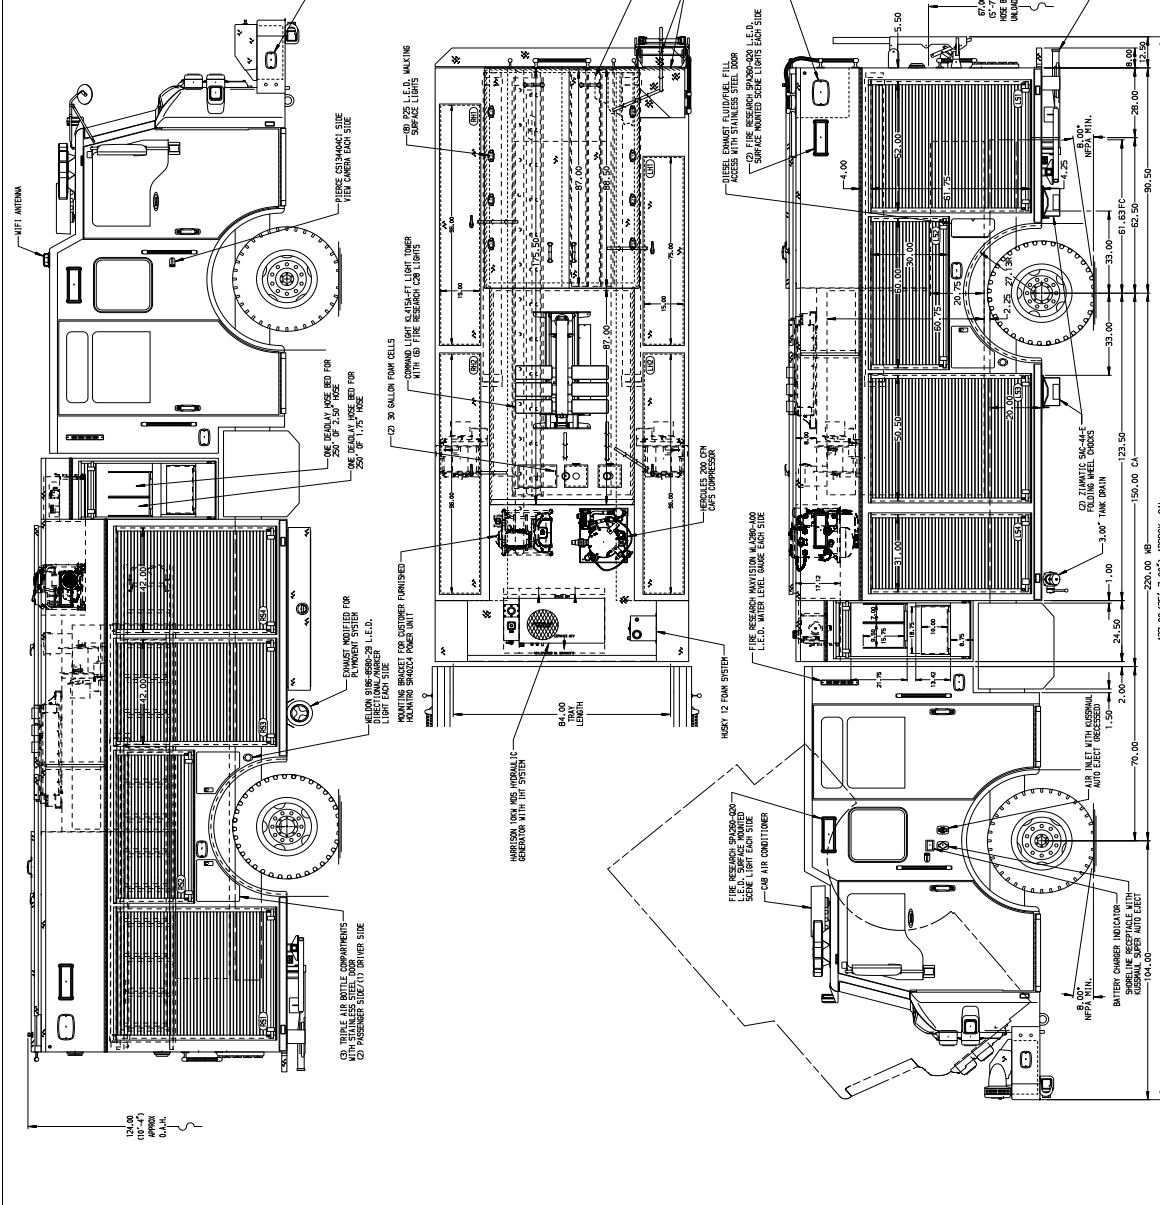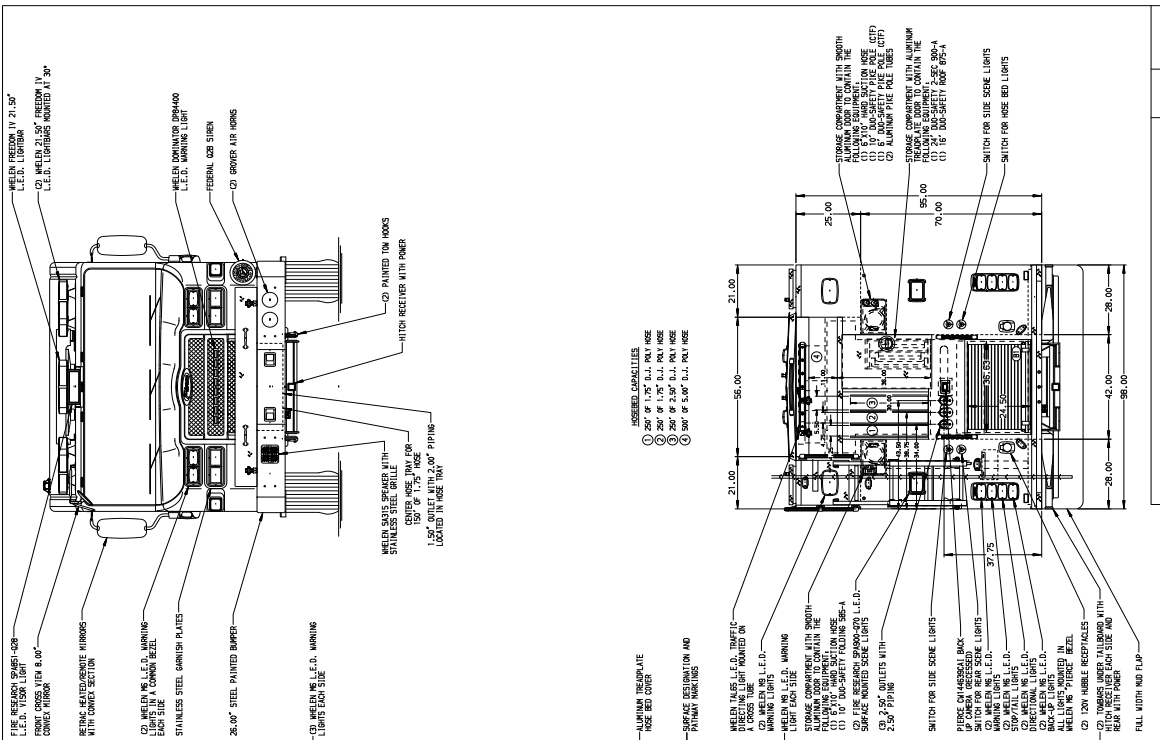

**33285AD**

<b>JOB NO.</b>	<b>33285</b>	<b>SCALE</b>	<b>DATE</b>
<b>DRWN BY</b>	050118	<b>CHKD BY</b>	050118
<b>DESIGNED BY</b>	050118	<b>DATE</b>	050118
<b>FOR</b>	MILLSTONE FIRE DISTRICT #1	<b>VEHICLE TYPE</b>	FR
<b>MANUFACTURED BY</b>	PIERCE	<b>FR</b>	NO.
<b>NO.</b>	33285AD	<b>FR</b>	NO.

CHASSIS	DATA	DATE	BY	CHKD	NO.
1500-D-810P-750 GALL. WATER W/ (2) 30 GAL. FOAM CELLS					
TITLE	21'4" PUC RESCUE BODY, LADDER TUNNEL THRU WATER TANK				
FOR	MILLSTONE FIRE DISTRICT #1				
MANUFACTURED BY	PIERCE				
VEHICLE TYPE	FR				

**MAXIMUM O.A.L. 427.00" SIDE ROLL AND FRONTAL IMPACT PROTECTION**

**ALUMINUM BODY**

1. THE MAXIMUM OVERALL WIDTH IS APPROXIMATE AND IS SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
2. THE MAXIMUM OVERALL LENGTH IS APPROXIMATE AND IS SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
3. THE MAXIMUM OVERALL HEIGHT IS APPROXIMATE AND IS SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
4. THE MAXIMUM OVERALL WEIGHT IS APPROXIMATE AND IS SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
5. THE MAXIMUM OVERALL WEIGHT IS APPROXIMATE AND IS SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
6. CERTAIN DIMENSIONS ARE NOT SHOWN.

NEW F-150 POWER STEERING KIT REQUIRED