Pierce Enforcer Pumper

Town of Clinton

Job #40865

Features & Specifications

- Pierce Enforcer 70" Chassis with a 10" Raised Roof
- Cummins X12 500hp 2024 EPA compliant Engine
- Allison EVS4500P Automatic Transmission
- TAK-4 Independent Front Suspension
- Hale QMAX 2000 GPM Single Stage Pump
- 1000 Gallon Poly Water Tank
- Vanner LifeSine LSC .825kW Single Phase Inverter
- Delivered in November 2025

Sold By:
Eric Trevena

FIRE & SAFETY SERVICES

South Plainfield, NJ

www.f-ss.com · 800-400-8017

PUMPER

BODY
Long Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

ELECTRICAL SYSTEM
Hard Wired

CHASSIS

AXLE,FRONT,CUSTOM
22,800 Lb TAK-4 Axle

AXLE,REAR
27,000 Lb Dana Axle

ENGINE
500 HP Cummins X12 Engine

TRANSMISSION
Allison 6th Gen, 4500 EVS P

BUMPER
22" Extended Pointed Steel

CAB
7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY
1000 Gallon New York Style Poly Tank

WATER CAPACITY
1000 Gallons of Water

FOAM CELL CAPACITY
Foam Cell Not Required

COMPT,PUMPER,REAR
37.75" FF Rollup Rear Compt

COMPT,PUMPER,LEFT SIDE
161" Lap Full Height Front & Rear FDLER

COMPT,PUMPER,RIGHT SIDE
161" Lap Low FDLER

FIRE SUPPRESSION

PUMPHOUSE
52" Control Zone Side Mount

PUMP
2000 GPM Hale QMAX-200

CROSSLAYS,1.50"
1.50" Crosslays Not Required

CROSSLAYS,2.50"
2.50" Crosslay Not Required

SPEEDLAYS
Speedlays Not Required

GENERATOR
Generator Not Required

FOAM SYSTEM
Foam System Not Required

SAFETY

Side Roll and Frontal Impact Protection

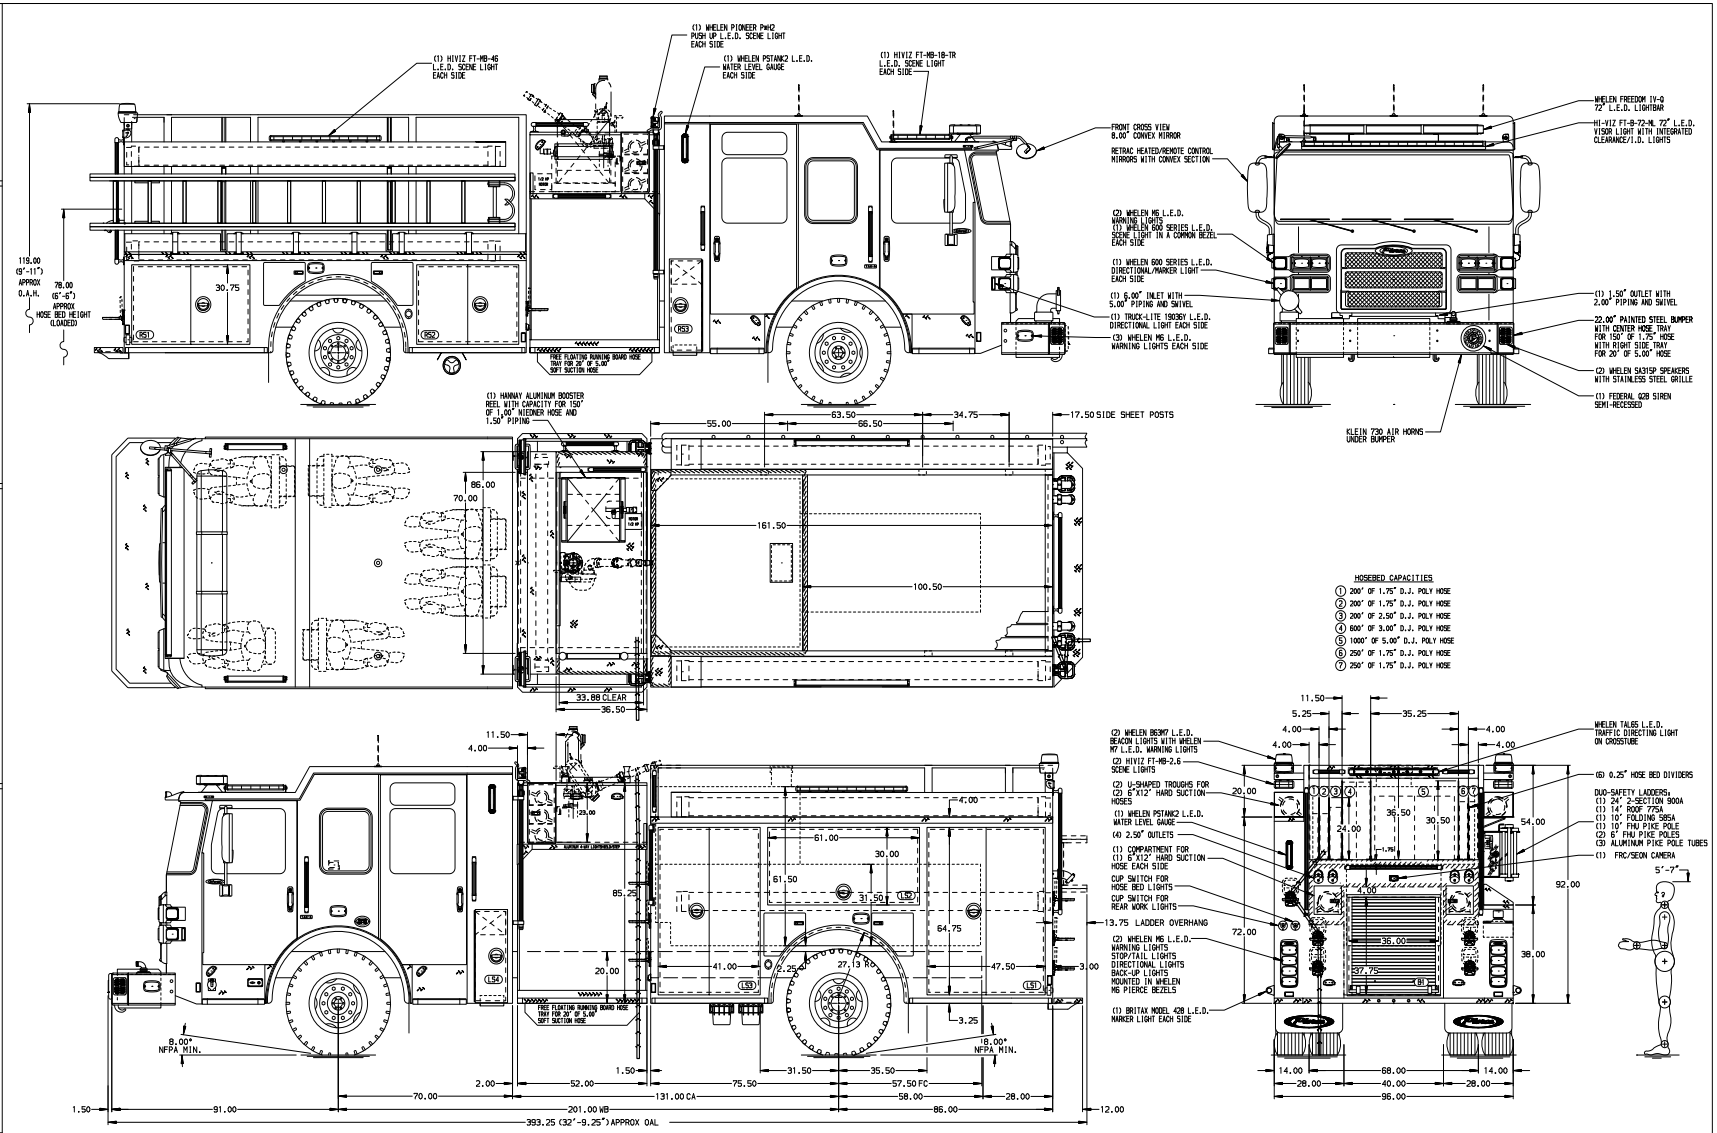

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. SHORELINE RECEPTACLE WITH NEMA STRAIGHT BLADE LOCATED IN DRIVER SIDE STEP WELL
2. AIR INLET/OUTLET WITH DISCONNECT COUPLING AND 1/4 TURN VALVE IN THE DRIVER SIDE STEPWELL
3. INVERTER/BATTERY CHARGER LOCATED PER ORDER
4. THREE ADJUSTABLE SHELVES LOCATED PER ORDER
5. THREE FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
6. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
7. STAINLESS STEEL SCUFFPLATE ON BODY REAR CORNERS
8. DRIP PAN GUARD FOR ROLL-UP DOOR IN B1 COMPARTMENT
9. PARTITION BETWEEN COMPARTMENTS LS1/B1 AND RS1/B1
10. TWO 120V 6-PLACE RECEPTACLE STRIPS MOUNTED IN CAB PER SHOP ORDER
11. TWO 120V 6-PLACE RECEPTACLE STRIPS MOUNTED IN COMPARTMENTS PER SHOP ORDER

REV	DATE	BY	CH	
V	17SEP25	BTH	ZWE	CHASSIS DATA
V	04SEP25	JAM	ZWE	
V	05AUG25	BTH	ZWE	MAKE
V	14MAY25	BTH	ZWE	PIERCE
V	11APR25	BTH	ZWE	MODEL
				ENFORCER

Pierce MANUFACTURING INC.

JOB NO.	40865
SCALE	1:24
DATE	
TITLE	Pierce Pumper Approval Drawing
	-
FOR	Clinton
	-
DRAWN BY	BTH 28FEB25
CHECKED BY	MMF 28FEB25
DWG NO.	40865AD
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 17-SEP-2025 13:31:15