Pierce Arrow XT Non-Walk-in Heavy-Duty Rescue

Township of Mahwah

Job #41016

Features & Specifications

- Pierce Arrow XT 81" Chassis with a 10" Raised Roof
- Cummins X12 525hp 2024 EPA compliant Engine
- Allison EVS4000P Automatic Transmission
- TAK-4 Independent Front Suspension
- 20.5 Foot Non-Walk-In Heavy-Duty Rescue
- Harrison 25kW Single Phase PTO Generator
- Delivered in June 2026

Sold By:
Bill Ring

FIRE & SAFETY SERVICES

South Plainfield, NJ

www.f-ss.com · 800-400-8017

RIGHT SIDE COMPARTMENTS
CONTAIN THE FOLLOWING:

COMPARTMENT RS1 CONTAINS:
- (1) STD DEPTH ADJ SLIDE OUT/TILT TRAY
- (1) FLOOR MOUNTED TRAY(+750)
- (1) 15/20A,120V DUPLEX RECEPTACLE
-
-

COMPARTMENT RS2 CONTAINS:
- CARGO RETENTION NETTING
- TREADPLATE ANGLED FLOOR
- (1) 15/20A,120V DUPLEX RECEPTACLE
-
-

COMPARTMENT RS3 CONTAINS:
- (1) 1/2 DEPTH ADJ SLIDE OUT TRAY
- (1) FLOOR MOUNTED TRAY(+750)
- (1) 15/20A,120V DUPLEX RECEPTACLE
-
-

COMPARTMENT RS4 CONTAINS:
- (1) CAB LIFT CONTROLLER
- (1) HORIZONTAL FLOOR EXTENSION
- (1) 1/2 DEPTH FLOOR MTD SLIDE OUT TRAY WITH TOOLBOARD
- (1) FLOOR MOUNTED TRAY(+750)
- (1) ELECTRIC CORD REEL WITH 200' OF 10/3 YELLOW CORD
- (1) TOOL AIR REEL WITH 200' OF HOSE
- (1) 15/20A,120V DUPLEX RECEPTACLE
-

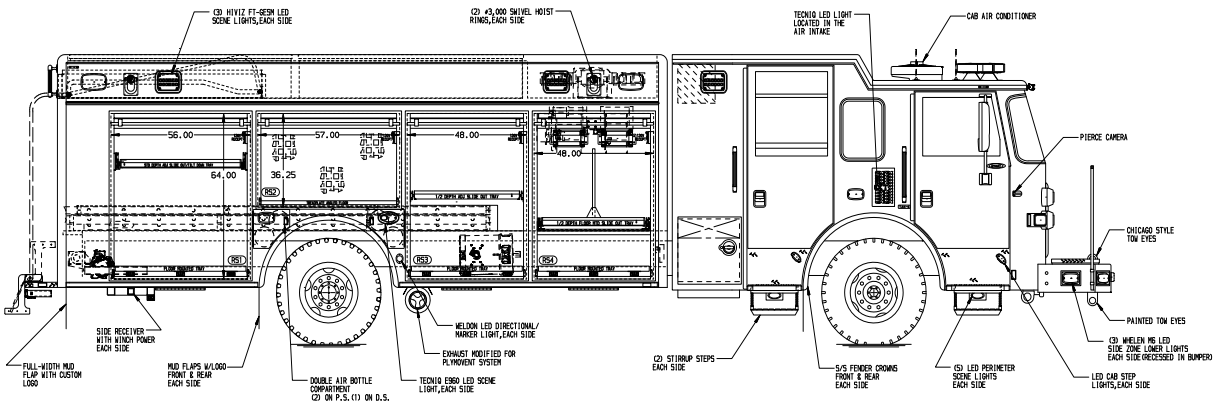

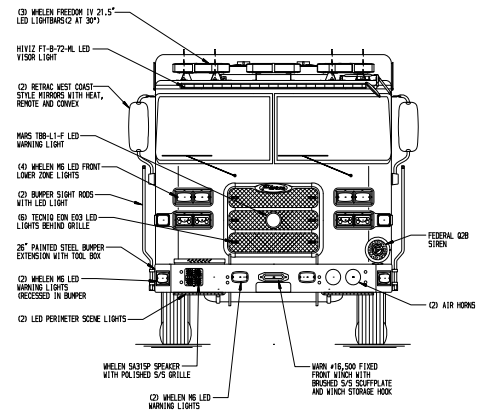

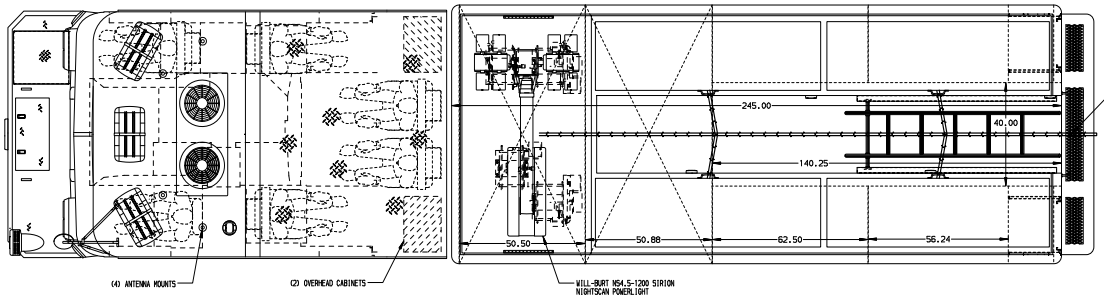

REAR COMPARTMENT CONTAINS
THE FOLLOWING:

COMPARTMENT B1 CONTAINS:
- (1) RACK FOR THE FOLLOWING:
  - (5) SHEETS OF 4'X8' PLYWOOD
  - (8) 4'X4' SHORING LUMBER
  - (1) 24'2-SECTION LADDER
  - (1) 14' ROOF LADDER
  - (1) 10' FOLDING LADDER
  - (4) PIKE POLES
- (1) 130"DP FLOOR MTD SLIDEMASTER TRAY
- (1) POWER DISTRIBUTION BOX

COMPARTMENT B2 CONTAINS:
-
-

COMPARTMENT B3 CONTAINS:
-
-

COMPARTMENT B4 CONTAINS:
- REAR WINCH ROPE AND HOOK
-
-

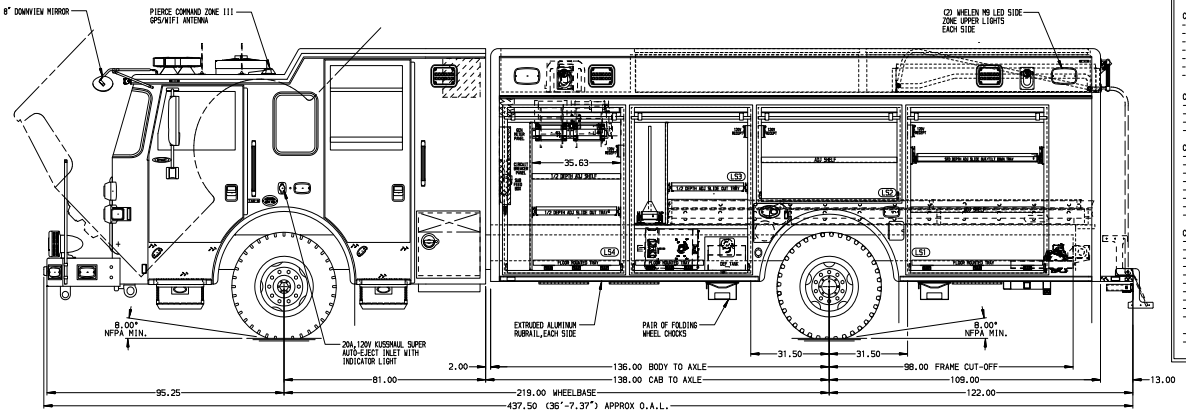

LEFT SIDE COMPARTMENTS
CONTAIN THE FOLLOWING:

COMPARTMENT LS1 CONTAINS:
- (1) STD DEPTH ADJ SHELF
- (1) STD DEPTH ADJ SLIDE OUT/TILT TRAY
- (1) FLOOR MOUNTED TRAY(+750)
- (1) 15/20A,120V DUPLEX RECEPTACLE
-
-

COMPARTMENT LS2 CONTAINS:
- (1) STD DEPTH ADJ SHELF
- (1) 15/20A,120V DUPLEX RECEPTACLE
-

COMPARTMENT LS3 CONTAINS:
- (1) 10 GALLON DEF TANK
- (1) HORIZONTAL FLOOR EXTENSION
- (1) 1/2 DEPTH ADJ SLIDE OUT TRAY
- (1) 1/2 DEPTH FLOOR MTD SLIDE OUT TOOLBOARD
- (1) FLOOR MOUNTED TRAY(+750)
- (1) 15/20A,120V DUPLEX RECEPTACLE
- (1) VERTICAL COMPARTMENT DIVIDER
-

COMPARTMENT LS4 CONTAINS:
- (1) KUSSMAUL CHIEF 40 AMP CHARGER
- (1) CIRCUIT BREAKER PANEL
- (1) GENERATOR METER PANEL
- (1) SUB FEED BOX
- (1) NIGHTSCAN CONTROLLER
- (1) VERTICAL COMPARTMENT DIVIDER
- (1) 1/2 DEPTH ADJ SHELF
- (1) FLOOR MOUNTED TRAY(+750)
- (1) 1/2 DEPTH ADJ SLIDE OUT TRAY
- (1) ELECTRIC CORD REEL WITH 200' OF 10/3 YELLOW CORD
- (1) TOOL AIR REEL WITH 200' OF HOSE
- (1) 15/20A,120V DUPLEX RECEPTACLE

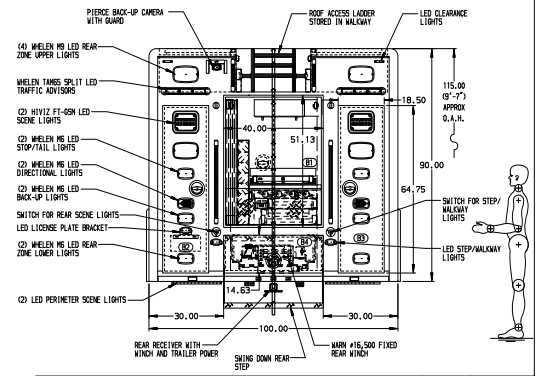

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

NOTES:
1. HARRISON 25KW SINGLE PHASE PTO DRIVEN GENERATOR LOCATED BETWEEN THE FRAME RAILS
2. ONSPOT AUTOMATIC TIRE CHAINS
3. ALUMINUM TREADPLATE ON REAR OF ENGINE TUNNEL
4. BRUSHED S/S SCUFFPLATES ON CAB AND CREW CAB DOOR JAMBS
5. ALUMINUM TREADPLATE ON CREW CAB ROOF
6. AIR INLET WITH DISCONNECT COUPLING ON DRIVER'S SEAT RISER
7. FLOOR IN CAB AND CREW CAB TO BE PADDED RUBBER
8. S/S GUARDS ON ALL BODY ROLL-UP DOORS
9. PIERCE LED STRIP LIGHTS IN ALL BODY AND HATCH COMPARTMENTS

MAXIMUM O.A.H. 9'-7"
SIDE ROLL AND FRONTAL IMPACT PROTECTION

CLEAR DOOR WIDTH KEY	
ARMOR ROLL UP DOORS:	-2 1/4"
GORILLA ROLL UP DOORS:	-2 1/2"
PIERCE DOUBLE LIP DOORS:	-4 1/4"
PIERCE LIFT-UP LIP DOORS:	-1 1/2"

(EX: 80"F-F - 2 1/4"= 57 3/4" CLEAR)
(F-F)= FRAME TO FRAME

REV	DATE	BY	CH
V	22JUL25	DHE	AZU
V	09MAY25	DHE	AZU
V	27FEB25	DHE	GFI

CHASSIS DATA
MAKE: PIERCE
MODEL: AX8110

Pierce MANUFACTURING INC.

TITLE: HEAVY DUTY RESCUE / NON-WALKIN
FOR: TOWNSHIP OF MAHWAH BID #887 / FIRE & SAFETY SERVICES,LTD BILL RING
DWG NO. 41016AD

JOB NO. 41016
SCALE 1:24
DATE
DRAWN BY DHE 14JAN25
CHECKED BY GFI 14FEB25
SHEET SIZE D
SHEET NO. 1 OF 1

View File Created 22-JUL-2025 13:38:01