# Pierce Arrow XT Pumper

City of Elizabeth

**Job #39249-01**

## Features & Specifications

- Pierce Arrow XT 81" Chassis with a 10" Raised Roof
- Cummins L9 450hp 2021 EPA compliant Engine
- Allison EVS3000P Automatic Transmission
- Meritor Front and Rear Axles
- Waterous CSU 2000 GPM Two Stage Pump
- 700 Gallon Poly "New York Style" Water Tank
- Delivered in September 2025

Sold By:
Gregg Cariddi

FIRE & SAFETY SERVICES

South Plainfield, NJ

**www.f-ss.com · 800-400-8017**

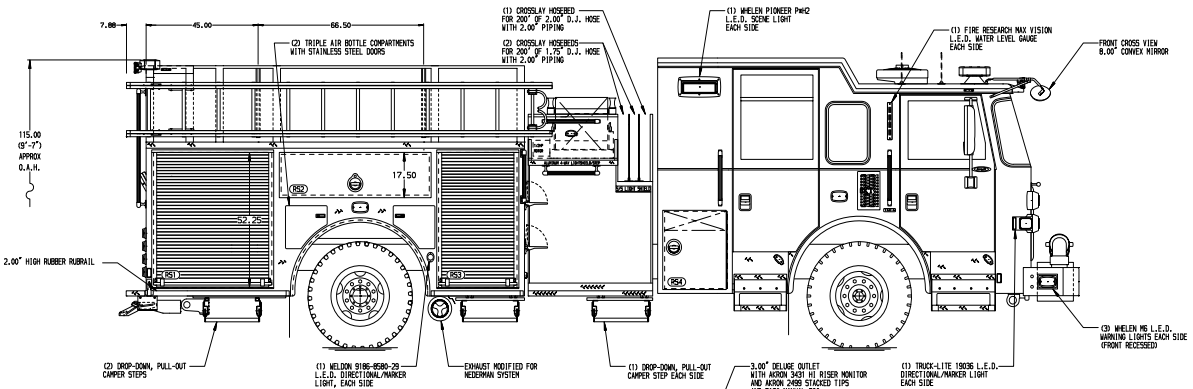


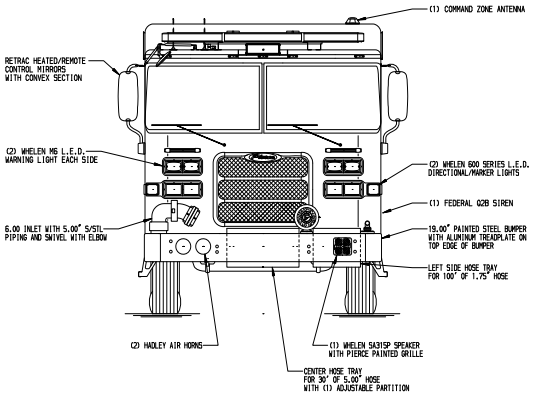


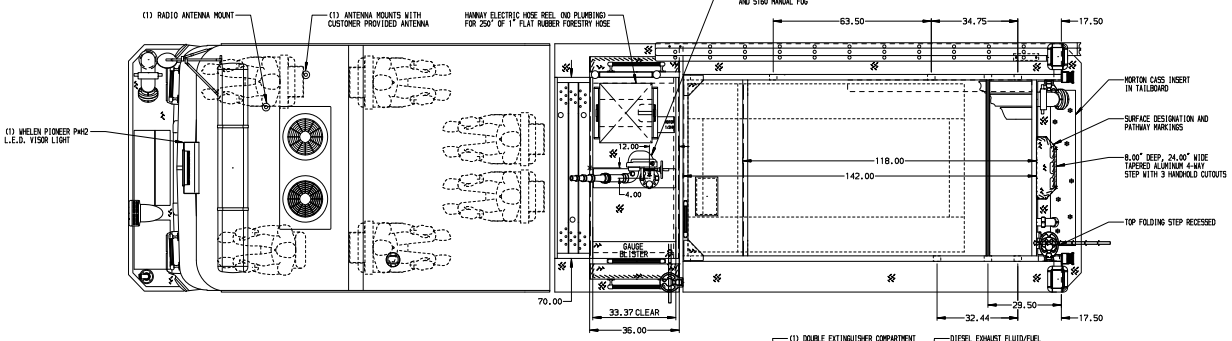


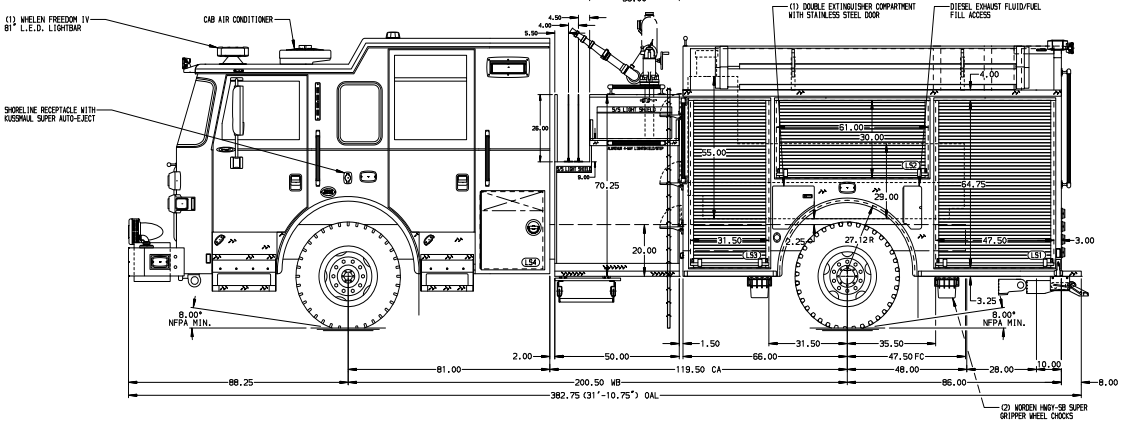


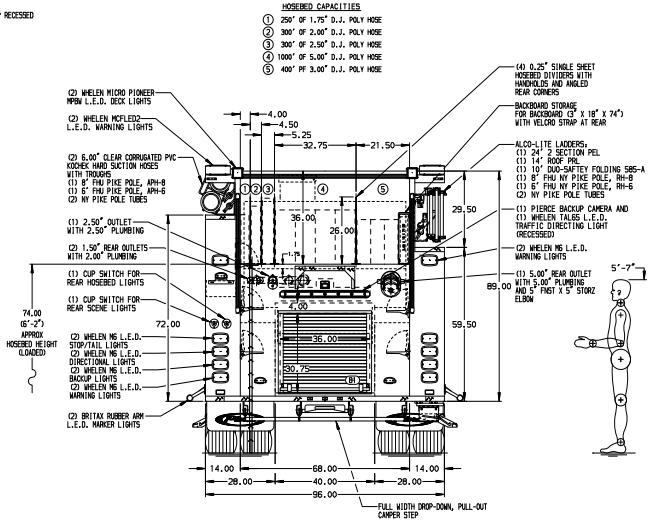


ALUMINUM BODY

MAXIMUM O.A.L. 382.75"

MAXIMUM O.A.H. 121"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. VOGEL LUBE SYSTEM PUMP LOCATED PER SHOP ORDER
2. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE SEAT RISER
4. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
5. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SEAT RISER WITH BRACKET
6. ALUMINUM 4-WAY ON FENDER PANELS
7. CROSSLAY DIVIDERS NOTCHED FOR NOZZLE (4" X 4") 8" FROM EACH END
8. 2 LEFT-MOST HOSBED DIVIDERS TO BE NOTCHED (4" X 4") 8" FROM THE REAR

| REV | DATE | BY | CH | CHASSIS DATA |
|---|---|---|---|---|
| | | | | |
| V | 11FEB25 | JDA | JKR | MAKE |
| V | 27JAN25 | JDA | JKR | PIERCE |
| V | 20DEC24 | JDA | JKR | MODEL |
| | | | | ARROW XT |

Pierce MANUFACTURING INC.

| | | | |
|---|---|---|---|
| JOB NO. | 39249 01-02 | | |
| SCALE | 1:24 | DATE | |
| TITLE | 2000GPM, 700G WATERTANK 152" PUMPER, MUX | DRAWN BY | JDA 03SEP24 |
| FOR | CITY OF ELIZABETH ELIZABETH, NEW JERSEY | CHECKED BY | SJS 03SEP24 |
| DWG NO. | 39249AD | SHEET SIZE | D |
| | | SHEET NO. | 1 OF 1 |

View File Created 11-FEB-2025 13:55:51